

GENERAL FEATURES		PRIME	STANDBY	
Power	KVA	90	100	
Power	KW	72	80	
Power	(cos Phi=0,8) A	129.6	144	
Standard Voltage	V	400/2	400/230	
Revolutions per minute	r.p.m	1500	1500	
Rated at power factor	Cos Phi	0,8		

STANDBY POWER;

It is the limited time operating power under variable load. Used as backup power at mains power failure. Overloads are not allowed.

PRIME POWER;

It is the continuous operating power under variable load. According to ISO 3046, 10% overload is allowed for 12 hours.



STANDARD FEATURES

- 4 Stroke, 1500 RPM, water cooled heavy duty diesel
- Dry type replaceable air filter
- Radiator capable of cooling up to 50 $^\circ$ C
- Flexible oil pipes and oil draining valve
- Pre-heater
- 4 Poles, synchronize, single bearing, brushless alternator
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis.
- Industrial type silencer
- Electronic battery charger
- Electrical wiring diagram
- User manual and operating manual

OPTIONAL FEATURES

- Soundproof canopy
- Automatic transfer switch
- Circuit breaker
- Trailer / Land transport
- External fuel tank
- Heating system for fuel tank
- Oil heater
- Fuel filling system (Automatic / Manuel)
- Analogue indicators
- 1 3 Phase switch plugs
- Alarm system for fuel level
- Remote control monitoring system

💿 w w w . f a m c o c o r p . c o m

E-mail: info@famcocorp.com

@famco_group

🕕 Tel:081- ۴ Л о о о о ۴ 9


() Fax:01 - ۴۴۹۹۴۶۴۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج) روبـروی پالایشگاه نفت پارس، پلاک ۱۴





ENGINE SPECIFICATION

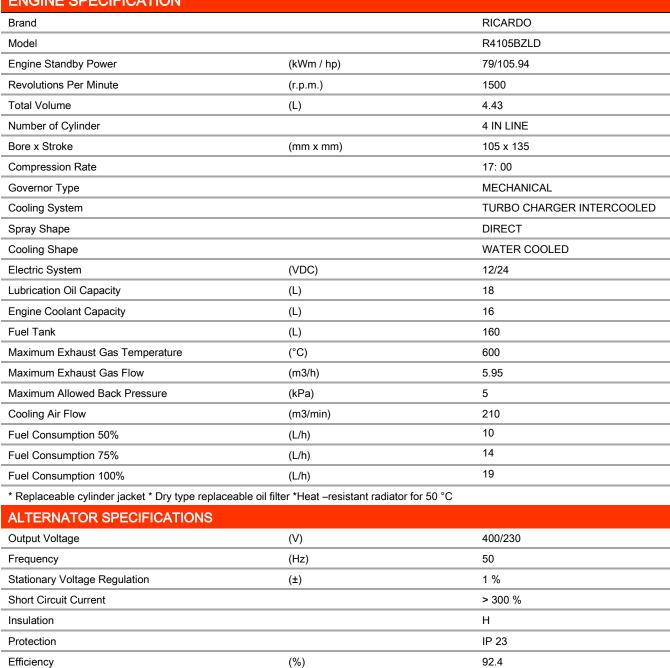

Z

кла

E-mail: info@famcocorp.com

@famco_group

Overloading

Power Factor

Connection Type

Number Of Pole

Number Of Bearing

Total Harmonic Distortion Rate

🛞 w w w . fa m c o c o r p . c o m

(cos Ph)

*4 Poles, Self – Excitation and Self-Cooled, Brushless, Synchro type alternator *Electronic type automatic voltage regulator [AVR]

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرچ) روبـروی پالایشگاه نفت پـارس، پلاک ۱۲

%110 FOR 1 HOURS

0.8

STAR

SINGLE

4

THF < 2 %





CONTROL PANEL SPECIFICATION

- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable languages
- Waveform display of V & I
- Harmonic analysis of V & I
- 16 Amp / 250V ŞK / JK outputs
- 8 configurable digital inputs
- 8 configurable digital outputs
- 3 configurable analogue inputs
- Both CANBUS-J1939 & MPU
- 3 configurable service alarms
- Outputs expandable to 40
- Inputs expandable to 40
- 4 configurable analog inputs

- Multiple automatic exerciser
- Weekly operation schedule •
- Dual mutual standby with equal
- Manual "speed fine adjust" •
- •
- Disable protections feature
- •
- Reverse power protection •
- •
- ٠

- Fuel filling & fuel theft alarms
- Battery back-up real time clock •
- Idle speed control •
- Battery charge run enabled
- Combat mode support
- Mains power counters

- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- · Fuel filling counter
- Fuel consumption counter
- Modem diagnostics display
- Configurable through USB,
- RS-232 and GPRS
- Free configuration program
- Allows SMS controls
- Ready for central monitoring Ethernet and GPRS
- Mobile genset support
- Automatic GSM geo-location
- GPS connectivity (RS232)
- Dynamic DNS support
- Easy USB firmware upgrade
- IP65 rating with optional gasket

SPECIFICATION WITHOUT CABIN			
	Length (L)	mm	2200
	Height (H)	mm	1500
	Width (W)	mm	900
	Wet weight	kg	1400
	Fuel Tank Capacity	L	75

SPECIFICATION WITH CABIN



Fuel Tank Capacity	L	75
Length (L)	mm	2500
Height (H)	mm	1700
Width (W)	mm	1000
Wet weight	kg	1500
Fuel Tank Capacity	L	160

www.famcocorp.com (3) E-mail: info@famcocorp.com

@famco_group

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج) روبـروی پالایشگاه نفت پارس، پلاک ۱۴



- Automatic fuel pump control
- Excess power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection