

PTD Series

206/306/406
206T/306T/405T



DIESEL ENGINE PUMP

SELF-PRIMING CENTRIFUGAL PUMP


PTD206/306/406

- SELF-PRIMING PUMP requires no water for subsequent pumping operation once initial pumping is done, and the pumping capacity is large.
- EFFICIENT, ECONOMICAL OPERATION is assured by directly coupled pump. It provides compactness and guarantees that power is not lost.
- WATER-RESISTING QUALITIES are prominent by adopting mechanical seal and the impellers which are made of special cast iron.
- HIGHLY ADVANCED ROBIN DIESEL ENGINE, which is powerful and durable ensures easy maintenance and trouble-free operation.

PTD306




STANDARD ACCESSORIES



The above picture shows typical samples. Material and design may vary by models.

PERFORMANCE CURVE

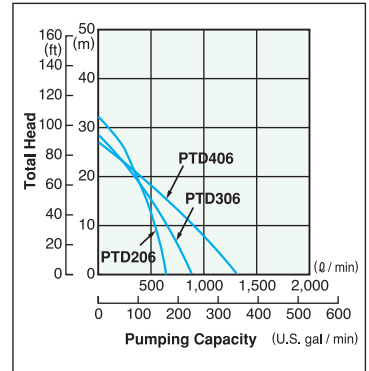

SELF-PRIMING TRASH PUMP

PTD206T/306T/405T

- HEAVY DUTY CONSTRUCTION PUMP are specially designed for heavy duty use such as construction field. Pumps with 3" and 4" pipe diameters are designed to suck up to 31mm dia. trash, and the pumps with 2" pipe diameters are designed to suck up to 20mm dia. trash.
- TOUGH AND POWERFUL PUMP MECHANICAL SEAL is made of silicon-carbide which has most hardness. IMPELLER is made of hi-chrome cast iron. INNER CASING is made of cast-iron and due to stainless steel liner inside inner casing only requires to be replaced when defacing. PUMP CASING, FRONT COVER are made of cast aluminum.

PTD206T




STANDARD ACCESSORIES



The above picture shows typical samples. Material and design may vary by models.

PERFORMANCE CURVE

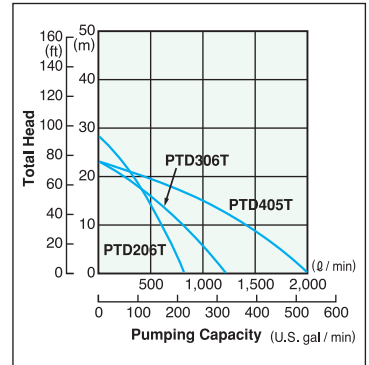

SPECIFICATIONS

MODEL		PTD206	PTD306	PTD406	PTD206T	PTD306T	PTD405T
PUMP	Type	Self-priming, Centrifugal pump			Self-priming, Trash pump		
	Suction x Delivery Diameters	50.8 x 50.8 (2 x 2)	76.2 x 76.2 (3 x 3)	101.6 x 101.6 (4 x 4)	50.8 x 50.8 (2 x 2)	76.2 x 76.2 (3 x 3)	101.6 x 101.6 (4 x 4)
	Total Head	32 (105)	28 (91.9)	27 (88.6)	28 (91.9)	23 (75.5)	
	Maximum Delivery Volume	520 (137)	900 (238)	1300 (343)	800 (172)	1200 (317)	2000 (528)
	Suction Head	8 (26)					
ENGINE	Axle Seal Material (Mechanical Seal)	Ceramic-carbon			Silicon - carbide		
	Model	DY23-2D		DY27-2D	DY23-2D	DY27-2D	DY41D
	Type	Air-cooled, 4-cycle, single cylinder diesel engine					
	Fuel	Automobile diesel light oil					
	Fuel Tank Capacity	3.2 (0.85)			4.5 (1.19)		
	Lubricant	Diesel Engine OIL, Service rank CC or CD grade					
	Lubricating Oil capacity	0.9 (0.24)			1.1 (0.29)		
Starting system	Reciol starter						
Dimensions (L x W x H)	539 x 368 x 455 (21.2 x 14.5 x 17.9)	590 x 410 x 510 (23.2 x 16.1 x 20.1)	680 x 410 x 590 (26.8 x 16.1 x 23.2)	610 x 410 x 510 (24.0 x 16.1 x 20.1)	680 x 410 x 590 (26.8 x 16.1 x 23.2)	730 x 485 x 610 (28.7 x 19.1 x 24.0)	
Dry weight	40.5 (89.3)	43.5 (95.9)	52.2 (115.1)	51.5 (113.6)	61 (134.5)	89 (196.2)	
Standard accessories	Engine tool kit (1pc.), Strainer (1pc.), Hose band (3pcs.), Hose coupling (2pcs.)						

Specifications are subject to change without notice.



www.famcocorp.com

E-mail: info@famcocorp.com

@famco_group

Tel: ۰۲۱- ۴ ۸ ۰ ۰ ۰ ۰ ۴ ۹

Fax: ۰۲۱ - ۴ ۴ ۹ ۹ ۴ ۶ ۴ ۲

تهران، کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج)

روبروی پالایشگاه نفت پارس، پلاک ۱۲