

KARCHE

B 60 W BP PACK 115AH+D65+RINSE+AUTOFILL

Walk-behind scrubber dryer (60 l) for areas of 1000-2500 m² scores points with a traction drive, KIK and tank rinsing system, auto-fill, disc brush head and maintenance-free battery (115 Ah).













Order no.

| Technical data | | |
|----------------------------------|--------|---------------------|
| EAN code | | 4054278954639 |
| Drive type | | Battery |
| Working width of brushes | mm | 650 |
| Working width, vacuuming | mm | 900 |
| Tank of fresh/dirty water | 1 | 60 / 60 |
| Theoretical area performance | m²/h | 3900 |
| Practical area performance | m²/h | 2340 |
| Battery type | | maintenance-free |
| Battery | V / Ah | 24 / 115 |
| Battery runtime | h | max. 2 |
| Power supply for battery charger | V / Hz | 100 - 240 / 50 - 60 |
| Brush rotational speed | rpm | 180 |
| Brush contact pressure | g/cm² | 26 |
| Aisle turning width | mm | 1650 |
| Sound pressure level | dB(A) | 61 |
| Total permissible weight | kg | 300 |
| Dimensions (L × W × H) | mm | 1540 × 900 × 1160 |

| Equipm | ent | | | | |
|---------------------|------------------------------------|---------------|--------|------------------------------------|---|
| Disc bru | ısh | | | • | |
| Powerf | ul traction driv | e | | | 7 |
| Battery included | and built-in ch | narger | | | t: 60 W Bp Pack 115Ah+D65+Rinse+Autofill, 1.384-016.0, 2024-09-02 |
| Squeege | ee, v-shape | | | |)24 |
| Tank-in | -tank design | | | • | , 20 |
| Patente | d tank rinsing | system | | • | 0.91 |
| Motor | | | | Battery | .0-4 |
| Auto Fil | I | | | | 387 |
| Type of | suction lips | | | oil-proof | |
| Kärcher concept | colour and op | erating | | • | utofil |
| | Intelligent Key ith over 30 use | | | • | nse+A |
| | ividual user rig | | | | <u>=</u> |
| | ase fastening p or similar | oossibilities | | • | +D65 |
| Easy Op | eration selecto | or switch | | • | 5Ah |
| Included | in the scope of supply | y. | | | 115 |
| | | | | | ЗСĶ |
| | | | | | рР |
| | 1 | | | | × N |
| 0000 | ۴۹ | مىوص كرج) | ده مخد | هران، کیلومتر ۲۱ بزرگراه لشگری (جا | ت B 60 \ |
| 44994 | 544 | | ک ۱۲ | وبـروی پالایشگاه نفت پـارس، پلا | J |

Users must receive training on this device.

(a) www.famcocorp.com

E-mail: info@famcocorp.com

@famco_group

(1) Tel:071- F A 0 0 0 0 F 9

(a) Fax:071 - 44994947








Proven double-disc technology

- Simple brush replacement in seconds: unlocking the brush via foot pedal, locking by lowering the machine or clipping in manually.
- Quiet and energy-efficient disc brush head.
- Suitable for numerous applications. Pads and pad drive boards are also available.




Powerful traction drive

- Easy to operate thanks to continuous speed adjustment (forwards and backwards).
- Maximum speed can be preset.
- Operated by control levers on the handle.

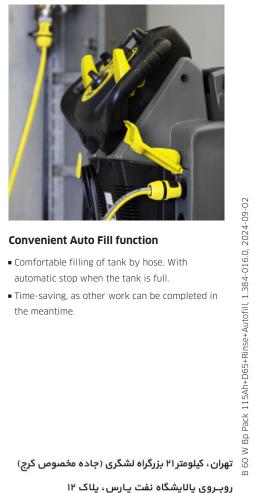


Convenient Auto Fill function

- Comfortable filling of tank by hose. With
- Time-saving, as other work can be completed in





@famco_group



(a) Fax:011 - FF99F9FF

روبـروی پالایشگاه نفت پارس، پلاک ۱۲





ACCESSORIES FOR B 60 W BP PACK 115AH+D65+RINSE+AUTOFILL 1.384-016.0




























| | | Order no. | Description | | |
|--|----------|-------------|--|--|------|
| DISC BRUSHES | | | | | |
| Disc brush, medium, red, 355 mm | 1 | 4.905-010.0 | Red standard disc brush for regular mainte | nance cleaning. | |
| Disc brush, very soft, White, 355 mm | 2 | 4.905-011.0 | White, soft disc brush for the gentle cleaning | ng of sensitive floor coverings. | |
| Disc brush, soft, natural, 355 mm | 3 | 4.905-012.0 | Natural-coloured, soft disc brush for cleani | ng and polishing textured floor coverings. | |
| Disc brush, hard, Black, 355 mm | 4 | 4.905-013.0 | Black, very abrasive disc brush for the dee sticky dirt. | p cleaning of hard-wearing floor coverings with very | |
| BRUSH HEADS | <u> </u> | | | | |
| Brush head D65 S | 5 | 2.763-003.0 | side splash guards are adjustable in the he | ck-change-system and a working width of 65 cm. The ight. So the water will be kept under the brush-head. The ne squeegee, also in driving turns. Brush head packed | |
| Brush head S65 | 6 | 2.763-030.0 | Floor head with cleaning pad for restoring pressure on the entire pad surface. Also cle | shine on hard and resilient floors. Constant contact cans edges and in corners. | |
| Connection kit S65 | 7 | 4.036-063.0 | Connection kit for connecting the S 65 floo | r head to the new generation of B 60 W and B 80 W. | Г |
| WIPING FLAPS | | | | | |
| Modification kit, squeegee blades for brush head | 8 | 2.763-031.0 | Floating squeegee blades adapt to the surfa | ace. Fits D 90, D 75 and D 65. | |
| SQUEEGEES AND SQUEEGEE BLADES | | | | | |
| Squeegees | | | _ | | |
| Squeegee, 900 mm, V-shaped | 9 | 4.777-079.0 | 900 mm long, V-shaped squeegee with sucwith a long lifetime and for all floors. With | tion lips made from wear- and oil-resistant polyurethane spirit level for precise adjustment. | |
| Squeegee blades | | _ | _ | | |
| Squeegee blades for V-squeegee, oil-resistant, grooved, 1010 mm | 10 | 6.273-023.0 | Suction lip set, fluted and developed for V-shaped squeegees with length of 900 mm. The suction lips are made of wear- and oil-resistant polyurethane and are suitable for all floors. | | - |
| OTHER ACCESSORIES SCRUBBER DRIERS | | | | | |
| Miscellaneous | 1 | l | I= | | 1_ |
| Cover, tank cleaning compl. | 11 | 4.035-386.0 | dryers with tank cleaning system in the B 60 range. | | |
| KIK key, yellow | 12 | 5.035-344.0 | User key for using the appliance | | |
| KIK key, grey | 13 | 5.035-348.0 | Supervisor key for using the appliance | | |
| KIK key, white | 14 | 4.035-076.0 | User key for using the appliance programmable | | |
| ■ Included in the scope of supply. □ Availa | able a | ccessories. | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| ⊗ w w w . f a m c o c o r p . c o | m | | Tel:0Υ1− ₭ Λ 0 0 0 0 ₭ 9 | المرابع | ı, s |
| | | | Теl:∘۲1- ۴ ∧ ∘ ∘ ∘ ∘ ۴ 9 Бах:∘۲1 - ۴۴99۴۶۴۲ | کیلومتر ۲۱ بزرگراه لشگری (جاده مخصوص کرج) ی پالایشگاه نفت پارس، پلاک ۱۲ | |

lacksquare Included in the scope of supply. \Box Available accessories.









ACCESSORIES FOR B 60 W BP PACK 115AH+D65+RINSE+AUTOFILL 1.384-016.0






























| | | Order no. | Description | |
|--|----|---|---|-----|
| OTHER ACCESSORIES SCRUBBER DRIERS | | | | |
| Miscellaneous | | | | |
| KIK key set, yellow | 15 | 15 4.035-408.0 Key for operators. Cannot be adjusted. | | |
| KIK key set, white | 16 | 4.035-064.0 | 5 white keys with keychain. Each key can be individually preset using the grey key supplied with the machine. This means that the machine parameters are always the same. The keychain helps to identify the key. This allows parameters to be set for cleaning in summer or winter, in sunshine or rain, on sensitive and hard-wearing floors or in workshops and showrooms. | |
| lome Base accessories | · | | | |
| Home Base adapter | 17 | 5.035-488.0 | Fastener for various hooks and clips on the machine. | |
| Home Base mop holder kit | 18 | 4.035-374.0 | The Homebase Mop kit contains mop clip, mop support and bottle holder - the perfect solution for securely carrying the mop directly on the scrubber drier. | |
| Double hook | 19 | 6.980-077.0 | Double hook for attaching rubbish bags, etc. to the machine. Only for use with the Homebase adapter 5.035-488.0. | |
| Holder handhold grey | 20 | 6.980-078.0 | Mop clip for attaching a mop to the machine. Only for use with the Homebase adapter 5.035-488.0 | . 🗆 |
| Bottle holder | 21 | 6.980-080.0 | Suitable for transporting spray bottles - only in conjunction with Home Base adapter 5.035-488.0. | |
| Home Base Box Kit | 22 | 4.035-406.0 | The Box kit provides enough space for three cleaning agent bottles along with cloths, scrapers, spare rubbish bags, gloves, etc. | |
| Jniversal hook kit | 23 | 4.070-075.0 | Hook and adaptor kit for attachment to the Home Base rail scrubber drier by Kärcher. Ideal for space-saving storage of hoses (for example, spray suction attachment kit) on the machine. | |
| Holder for squeegee | 24 | 9.753-088.0 | Holder for squeegee: The steel holder is attached to the Home Base rail of the scrubber drier and allows the safe storage and transportation of the squeegee. | |
| KITS | | | | |
| Other attachment kits | | ı | | |
| Auto-Fill | 25 | 4.035-345.0 | Automatic filling system. Water supply automatically stops when the tanks is full. With safety overflow. Additional, non-marking bumper rollers for assembly at the ends of the squeegee. Effectively | |
| Attachment kit stacked bumper roller Equeegee | 26 | 4.035-619.0 | Additional, non-marking bumper rollers for assembly at the ends of the squeegee. Effectively prevent the squeegee from hooking onto pallets or shelf feet. | |
| Fleet mounting kit | | 1 | | |
| Attachment kit Plug-in Connect Module | 27 | 2.644-391.0 | The IoT module* is used to transmit information on the location and operating hours of battery-powered Kärcher cleaning machines and third-party devices to the equipment management system. | |
| Spray extraction mounting kit | | | | |
| Spray suction attachment kit | 28 | 2.642-833.0 | Simplifies cleaning areas inaccessible for machines. | |
| Attachment kit Plug-in Connect Module Spray extraction mounting kit Spray suction attachment kit | 28 | | system. | |

 $[\]blacksquare$ Included in the scope of supply. \square Available accessories.



@famco_group





ACCESSORIES FOR B 60 W BP PACK 115AH+D65+RINSE+AUTOFILL 1.384-016.0























| | | Order no. | Description | | |
|---|---|--------------|--|--|------------|
| TRACTION BATTERIES AND CHARGERS | | | | | |
| Batteries Battery kit, 24 V, 115 Ah, maintenance-free | 29 | 2.815-091.0 | Battery kit with 24 V voltage and 115 Ah ((| C5) capacity. Comprising several maintenance-free single | ; = |
| Accessories for batteries | | | rem success. | | Н |
| Battery mounting kit | 30 | 2.638-037.0 | Installation kit for installing a battery kit in Image similar. | a machine. Incl. two spacers and one connection cable. | - |
| DISC PADS / PAD DRIVE BOARDS | | | | | |
| Microfibre pad | | | | | |
| Microfibre pad, White, 356 mm, 5 x | rofibre pad, White, 356 mm, 5 x 31 6.369-959.0 Microfibre disc pad for the reliable and gentle removal of grey haze. Ideal for fine stoneware | | tle removal of grey haze. Ideal for fine stoneware tiles. | | |
| | 32 | 6.905-060.0 | | | |
| Pads | | | | | Н |
| Pad, medium-soft, red, 356 mm, 5 x | 33 | 6.369-003.0 | Red, standard disc pad for regular maintena | ance cleaning. | |
| Pad, medium-hard, green, 356 mm, 5 x | 34 | 6.369-002.0 | Green, abrasive roller pad for deep cleaning | g, as well as the removal of sticky dirt. | |
| Pad, hard, Black, 356 mm, 5 x | 35 | 6.369-001.0 | Black, very abrasive disc pad for the deep of sticky dirt. | cleaning of hard-wearing floor coverings with very | |
| Pad drive boards | | | | | |
| Pad drive board, 335 mm | 36 | 4.762-446.0 | Pad driver plate for cleaning with pads, 33st and centre lock. Suitable for, e.g. D 65. | 5 mm diameter. With quick-change coupling, hook plate | |
| Diamond pad | | • | | | |
| Diamond pad, coarse, White, 356 mm, 5 x | 37 | 6.371-250.0 | White, coarse diamond disc pad for hard floor coverings. Removes minor scratches and creates a clean, even matt base for further treatment with yellow diamond disc pad. | | |
| Diamond pad, medium, Yellow, 356 mm, 5 x | 38 | 6.371-251.0 | Yellow, diamond disc pad for treating and maintaining hard floor coverings. For a silky matt surface which can then be polished with the green diamond disc pad. | | ; [|
| Diamond pad, fine, green, 356 mm, 5 x | 39 | 6.371-235.0 | Green, fine diamond disc pad for polishing and can also be used for crystallisation. | polishable floor coverings. Creates high-gloss surfaces | |
| SPRAY EXTRACTION MACHINES | | | | | |
| Other | | | _ | | |
| Cleaning agent container, complete | 40 | 4.070-006.0 | Kit consisting of cleaning agent container a | nd Home Base adapter. For connecting Home Base rail. | |
| ■ Included in the scope of supply. □ Availa | DIE dC | icessul les. | | | |
| ⊗ w w w . f a m c o c o r p . c o | | 1 | | | |

[■] Included in the scope of supply.

□ Available accessories.

