




# QSK60-G7

Fuel Optimized

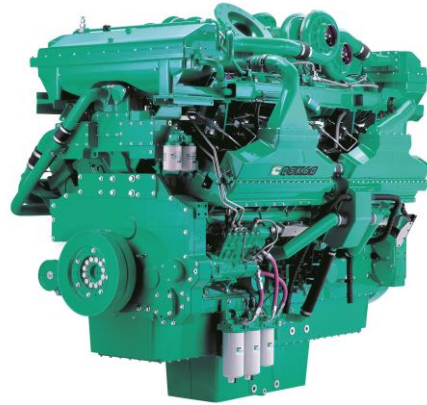

## Description

The QSK60 is a V 16 cylinder engine with a 60 litre displacement. This Quantum series utilizes sophisticated electronics and premium engineering to provide outstanding performance levels, reliability and versatility for Standby, Prime and Continuous Power applications.



This equipment has been built to comply with CE certification requirement subject to EU RoHS exclusion per EU 2011/65.



This engine has been designed in facilities certified to ISO9001 and manufactured in facilities certified to ISO9001 or ISO9002.

## Features

**Cummins High Pressure Injection (HPI) PT full authority electronic fuel system.** The HPI PT fuel system is managed by a G-Drive Governor Control System (GCS) controller, which is provided for off-engine mounting in the genset control panel. The Quantum Control has a specific fuel system board to interface with the HPI-PT fuel system and provides an Engine Protection package giving greater customer flexibility and cost effective alternatives in the control design and the benefits of Full Authority electronic control.

**CTT (Cummins Turbo Technologies) HX82/HX83 turbocharging** utilizes exhaust energy with greater efficiency for improved emissions and fuel consumption.

**Low Temperature After-cooling** - Two-pump Two-loop (2P2L)

**Ferrous Cast Ductile Iron (FCD) Pistons** - High strength design delivers superior durability.

**G-Drive Integrated Design** - Each component has been specifically developed and rigorously tested for G-Drive products, ensuring high performance, durability and reliability.

**Service and Support** - G-Drive products are backed by an uncompromising level of technical support and after sales service, delivered through a world class service network.

### 1500 rpm (50 Hz ratings)

Gross engine output			Net engine output			Typical generator set output					
Standby	Prime	Base	Standby	Prime	Base	Standby (ESP)		Prime (PRP)		Base (COP)	
kWm/BHP			kWm/BHP			kWe	kVA	kWe	kVA	kWe	kVA
1790/2399	1615/2165	1305/1749	1737/2329	1580/2119	1270/1703	1825	2000	1517	1825	1219	1524

### 1800 rpm (60 Hz ratings)

Gross engine output			Net engine output			Typical generator set output					
Standby	Prime	Base	Standby	Prime	Base	Standby (ESP)		Prime (PRP)		Base (COP)	
kWm/BHP			kWm/BHP			kWe	kVA	kWe	kVA	kWe	kVA
2180/2922	1975/2647	1740/2332	2120/2843	1937/2598	1702/2282	2000	2500	1825	2281	1633	2042

### General engine data

Type	4 cycle, turbocharged, After-cooled
Bore mm	159
Stroke mm	190
Displacement litre	60.2
Cylinder block	Cast iron, 16 cylinder
Battery charging alternator	55 amps
Starting voltage	24 volt, negative ground
Fuel system	Direct Injection Cummins HPI
Fuel filter	Spin-on fuel filters with water separator
Lube oil filter type(s)	Spin-on full flow filter
Lube oil capacity (l)	280
Flywheel dimensions	SAE 0

### Coolpac performance data

Cooling system design	2 pump - 2 loop
Coolant ratio	50% ethylene glycol; 50% water
Coolant capacity (l)	Engine only-Not applicable
Limiting ambient temp.** (°C)	
Fan power (kWm)	
Cooling system air flow (m <sup>3</sup> /s)**	
Air cleaner type	Dry replaceable element with restriction indicator

\*\* @ 13 mm H<sub>2</sub>O

### Fuel consumption 1500 (50 Hz)

%	kWm	BHP	L/ph	g/kWh
<b>Standby Power</b>				
100	1790	2399	415	109.5
<b>Prime Power</b>				
100	1615	2165	378	99.7
75	1211	1624	288	75.9
50	808	1083	200	52.9
25	404	541	115	30.3
<b>Continuous Power</b>				
100	1305	1749	309	81.6

### Fuel consumption 1800 (60 Hz)

%	kWm	BHP	L/ph	g/kWh
<b>Standby Power</b>				
100	2180	2922	520	137.2
<b>Prime Power</b>				
100	1978	2647	471	124.2
75	1481	1985	360	95.1
50	987	1324	254	67.1
25	494	662	152	40.1
<b>Continuous Power</b>				
100	1740	2332	417	110

### Weights and dimensions (Engine only)

Length mm	Width mm	Height mm	Weight (dry) kg
2781	1794	2155	7185

### Ratings definitions

Emergency Standby Power (ESP):	Limited-Time Running Power (LTP):	Prime Power (PRP):	Base Load (Continuous) Power (COP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited-Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN6271 and BS 5514.