

SIEMENS

Data sheet

3MT7006-0AA10-0AP0



3P Power Contactor AC3:6A 1NO AC230V 50Hz Main circuit: Screw Auxiliary circuit: Screw

product brand name	SINOVA
product designation	Power contactor
General technical data	
size of contactor	0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current at AC in hot operating state	7.5 W
• per pole	2.5 W
insulation voltage	
• of main circuit with degree of pollution 3 rated value	1 000 V
• of auxiliary circuit with degree of pollution 3 rated value	1 000 V
surge voltage resistance	
• of main circuit rated value	6 kV
• of auxiliary circuit rated value	6 kV
protection class IP	
• on the front	IP20
mechanical service life (operating cycles)	
• of contactor typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	07/01/2022
Weight	0.354 kg
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-5 ... +55 °C
• during storage	-25 ... +70 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %
Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage at AC-3 rated value maximum	690 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C rated value	25 A
• at AC-1 up to 690 V	
— at ambient temperature 40 °C rated value	25 A
— at ambient temperature 60 °C rated value	19 A
• at AC-3	
— at 400 V rated value	6 A

— at 690 V rated value	4 A
operating power <ul style="list-style-type: none"> at AC-3 <ul style="list-style-type: none"> at 400 V rated value at 690 V rated value 	2.2 kW 3 kW
no-load switching frequency <ul style="list-style-type: none"> at AC 	1 800 1/h
operating frequency <ul style="list-style-type: none"> at AC-1 maximum at AC-3 maximum 	600 1/h 750 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC <ul style="list-style-type: none"> at 50 Hz rated value 	230 V
operating range factor control supply voltage rated value of magnet coil at AC <ul style="list-style-type: none"> at 50 Hz 	0.85 ... 1.1
apparent pick-up power of magnet coil at AC <ul style="list-style-type: none"> at 50 Hz 	70 VA
inductive power factor with closing power of the coil <ul style="list-style-type: none"> at 50 Hz 	0.75
apparent holding power of magnet coil at AC <ul style="list-style-type: none"> at 50 Hz 	11 VA
inductive power factor with the holding power of the coil <ul style="list-style-type: none"> at 50 Hz at 60 Hz 	0.3 0.3
closing delay at AC	9 ... 25 ms
opening delay at AC	4 ... 15 ms
Auxiliary circuit	
number of NO contacts for auxiliary contacts <ul style="list-style-type: none"> instantaneous contact 	1
operational current at AC-12 maximum	10 A
operational current at AC-15 <ul style="list-style-type: none"> at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value 	6 A 3 A 2 A 1 A
operational current at DC-12 <ul style="list-style-type: none"> at 24 V rated value at 110 V rated value at 220 V rated value 	6 A 3 A 1 A
operational current at DC-13 <ul style="list-style-type: none"> at 24 V rated value at 110 V rated value at 220 V rated value at 600 V rated value 	6 A 1 A 0.3 A 0.1 A
Short-circuit protection	
design of the fuse link <ul style="list-style-type: none"> for short-circuit protection of the main circuit <ul style="list-style-type: none"> with type of coordination 1 required with type of coordination 2 required for short-circuit protection of the auxiliary switch required 	fuse gG: 32 A fuse gG: 25 A fuse gG: 10 A
mounting position	22.5° inclination forward and backward & 360° rotation, in relation to normal vertical mounting plane
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
height	74.5 mm
width	45 mm
depth	82 mm
Connections/ Terminals	
type of electrical connection <ul style="list-style-type: none"> for main current circuit 	screw-type terminals

• for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections for main contacts	
• solid or stranded	1x (1 ... 4 mm²), 2x (1 ... 4 mm²)
• finely stranded with core end processing	1x (1 ... 4 mm²), 2x (1 ... 1.5 mm²)
type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid or stranded	1x (1 ... 4 mm²), 2x (1 ... 4 mm²)
— finely stranded with core end processing	1x (1 ... 2.5 mm²), 2x (1 ... 1.5 mm²)
tightening torque	
• for main contacts with screw-type terminals	1.2 N·m
• for auxiliary contacts with screw-type terminals	1.2 N·m
design of the thread of the connection screw	
• for main contacts	M3.5
• of the auxiliary and control contacts	M3.5

Approvals Certificates			
General Product Approval	Test Certificates	other	Environment



[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3MT7006-0AA10-0AP0>



Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3MT7006-0AA10-0AP0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3MT7006-0AA10-0AP0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3MT7006-0AA10-0AP0&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current
<https://support.industry.siemens.com/cs/ww/en/ps/3MT7006-0AA10-0AP0/char>

Further characteristics (e.g. electrical endurance, switching frequency)
<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3MT7006-0AA10-0AP0&objecttype=14&gridview=view1>

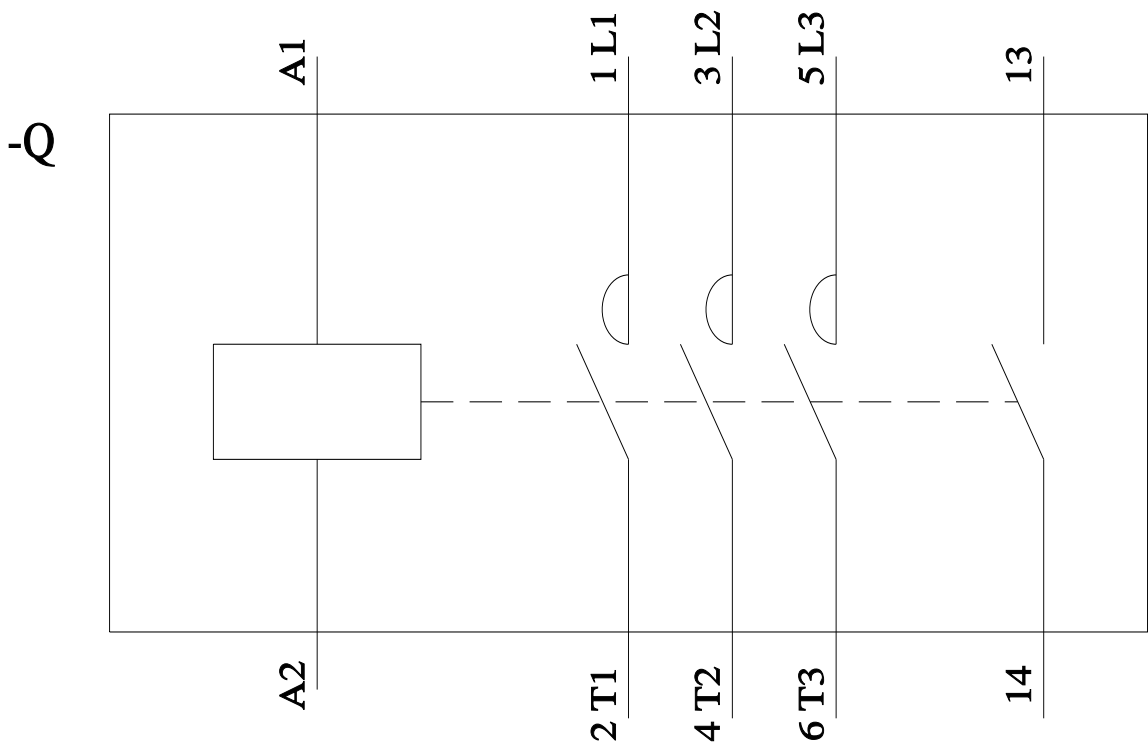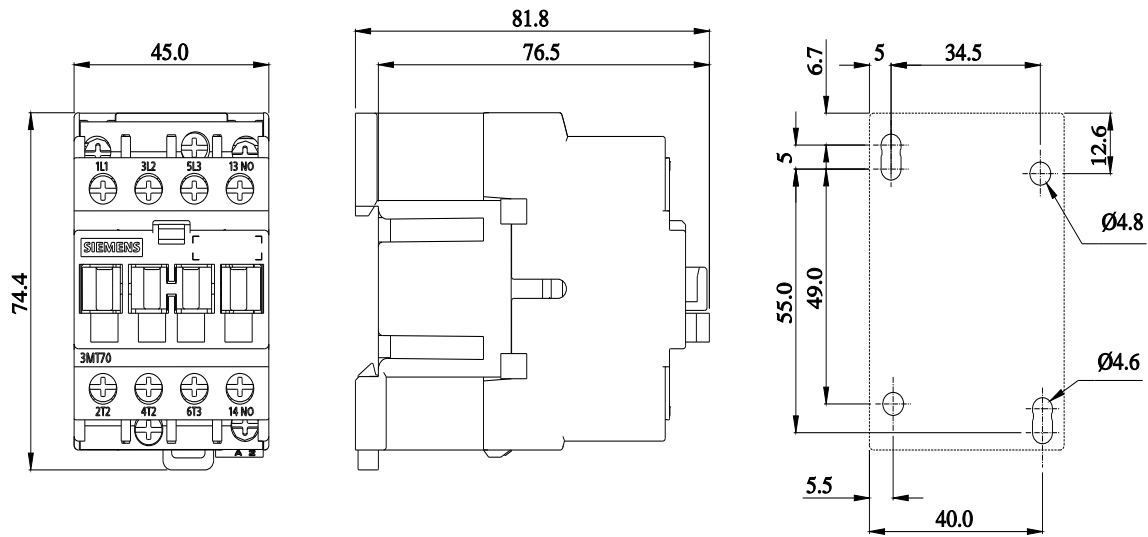

last modified:

4/4/2025

3MT70060AA100AP0
Page 4/5

9/15/2025

Subject to change without notice
© Copyright Siemens

